



PA-240Net

240W Networked Power Amplifier

| Speakers | Ethernet - RJ-45



PA-240Net is a high-performance, selectable Hi-Z (70V/100V) or Lo-Z (4Ω/8Ω) power amplifier featuring balanced and unbalanced inputs and additional line-level output and Dante interface. This versatile amplifier features built-in DSP, auto-standby and maximum durability. PA-240Net is suitable for a vast range of AV installations

FEATURES

High-performance Amplifier - With built-in DSP and additional balanced stereo line-level output. PA-240Net features flat frequency response, unmatched sonic performance, excellent signal to noise ratio, and extraordinarily low distortion levels

Adaptable to Any AV Installation - Switch between Lo-Z and Hi-Z to accommodate any type of loudspeaker installation. Select 1 Channel of 240W into a 70V/100V line or 2 channels of 120W into 4Ω/8Ω

Easy, Scalable and Cost-Effective Dante Audio Networking - Dante makes networking any size audio installation easy by providing digital signal transmission over a local area network using standard Internet protocols. The unit is part of the expanding family of products that make up Kramer's Dante ecosystem. These products are fully compatible and integrate into any Dante-enabled system

Interoperability - Supports AES67 and Dante allowing high-performance interoperability between IP-based audio networking systems

Individual Mix Per Output - Each output supports an independent input mix with master volume, 3-band parametric EQ, and selectable high-pass filter. Create one output mix and EQ settings suitable for the venue and another for recording or cascading more amplifiers, powered speakers or subwoofers according to any AV installation requirements

Professional, Studio Grade Signal Conversion Technology - Includes the latest generation 32-bit advanced Digital Analog Converter architecture to achieve excellent dynamic performance and improved tolerance to clock jitter. Maintains the quality of the original audio signal with selectable sampling rates up to 96 kHz

Durable and Reliable - PA-240Net is immune to failure. It includes layers of protection against over-current, DC voltage at the outputs, high frequency, and over-heating with intelligent, heat-sensitive fans for added protection

Flexible Control Options - Control locally via RS-232 serial commands or remotely, via embedded web pages over Ethernet


Power Efficient - This super-efficient amplifier includes auto-standby for power saving and cost reducing operation. No need to rely on default auto-standby settings. Adjust your noise floor threshold based on exactly when your amplifier needs to go into sleep mode and when it needs to wake up

Easy Installation - ½ 19" size enables mounting in a 1U rack space with the recommended rack adapter



TECHNICAL SPECIFICATIONS

Inputs	2 Channels, on a Dante™ Net: On an RJ-45 connector 1 Balanced Stereo Audio: +4dBu/10kΩ, on a 5 pin terminal block
Outputs	1 Balanced Stereo Audio: line level, on a 5-pin terminal block 1 Speaker: On a 4-pin large terminal block
Ports	1 Control via IP: on an RJ-45 connector 1 RS-232: on a 3-pin terminal block
Amplifier	Input Sensitivity: Full power @ 0.3V (-10dBV) Output Power 2 x 120W @ 4Ω or 8Ω, 1 x 240W @ 70V or 100V Class: D Maximum Voltage Gain: 26dB SE / 32dB BTL Dynamic Range: 119dB Frequency Response: 20Hz to 20kHz @ +/-1dB S/N Ratio: 80dB, 20Hz – 20kHz Audio THD + Noise: THD+N (1kHz @ 1W) 0.003 % Audio 2nd Harmonic: 0.08% @ 75W RMS @ 4Ω 6.67kHz
User Interface	Controls Output volume attenuator, IP and RS-232
Power	Source Universal mains operational voltage 85V AC – 265V AC (full power at 120V – 230V) Consumption 265VA Total System Efficiency 90%
Environmental Conditions	Operating Temperature: 0° to +40°C (32° to 104°F) Storage Temperature: -40° to +70°C (-40° to 158°F) Humidity: 10% to 90%, RHL non-condensing
Regulatory Compliance (Standards Compliance)	Safety: CE, FCC Environmental: RoHs, WEEE
Enclosure	Size: ½ 19" desktop Type: Aluminum Cooling: Fan ventilation
Accessories	Included: Power cord
Product Dimensions	21.46cm x 16.30cm x 4.36cm (8.45" x 6.42" x 1.72") W, D, H
Product Weight	1.1kg (2.3lbs) approx
Shipping Dimensions	40.50cm x 29.70cm x 9.00cm (15.94" x 11.69" x 3.54") W, D, H
Shipping Weight	1.7kg (3.6lbs) approx

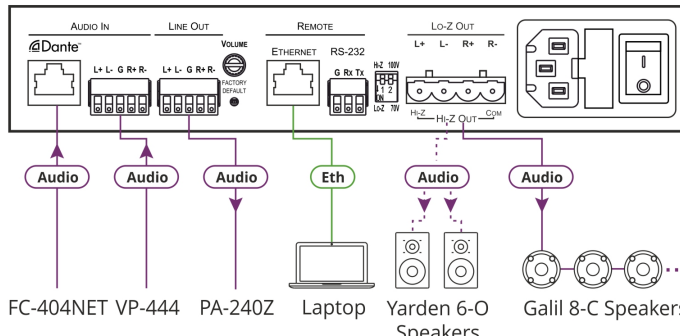

FC-404NET VP-444 PA-240Z

Laptop Yarden 6-O Speakers

Galil 8-C Speakers

Lo-Z setup:
 Hi-Z 100W
 Lo-Z 70W
 Connect L+ and L- to left speaker; R+ and R- to right speaker.

Hi-Z setup:
 Hi-Z 100W
 Lo-Z 70W
 Connect Hi-Z and COM on the device to (+) and (-) on the speakers, respectively.