



6 BAY, DUAL MONITOR CREDENZA

D2/367BM2/

This robust, large-capacity cabinet system houses all electronics, including integrated support for AV and IT systems. Freestanding and fully-integrated, this credenza is perfect for retrofit installations, allowing for quick and efficient installation without involving additional tradespeople to install electrical wiring or reinforce walls.

Available in a variety of styles.



DYO
DESIGN YOUR OWN

See our **full-line catalog** for more customizable credenzas or visit SalamanderDesigns.com/Commercial







6 BAY, DUAL MONITOR CREDENZA

COLLABORATION FURNITURE

D2/367BM2/

BUNDLE SOLUTIONS

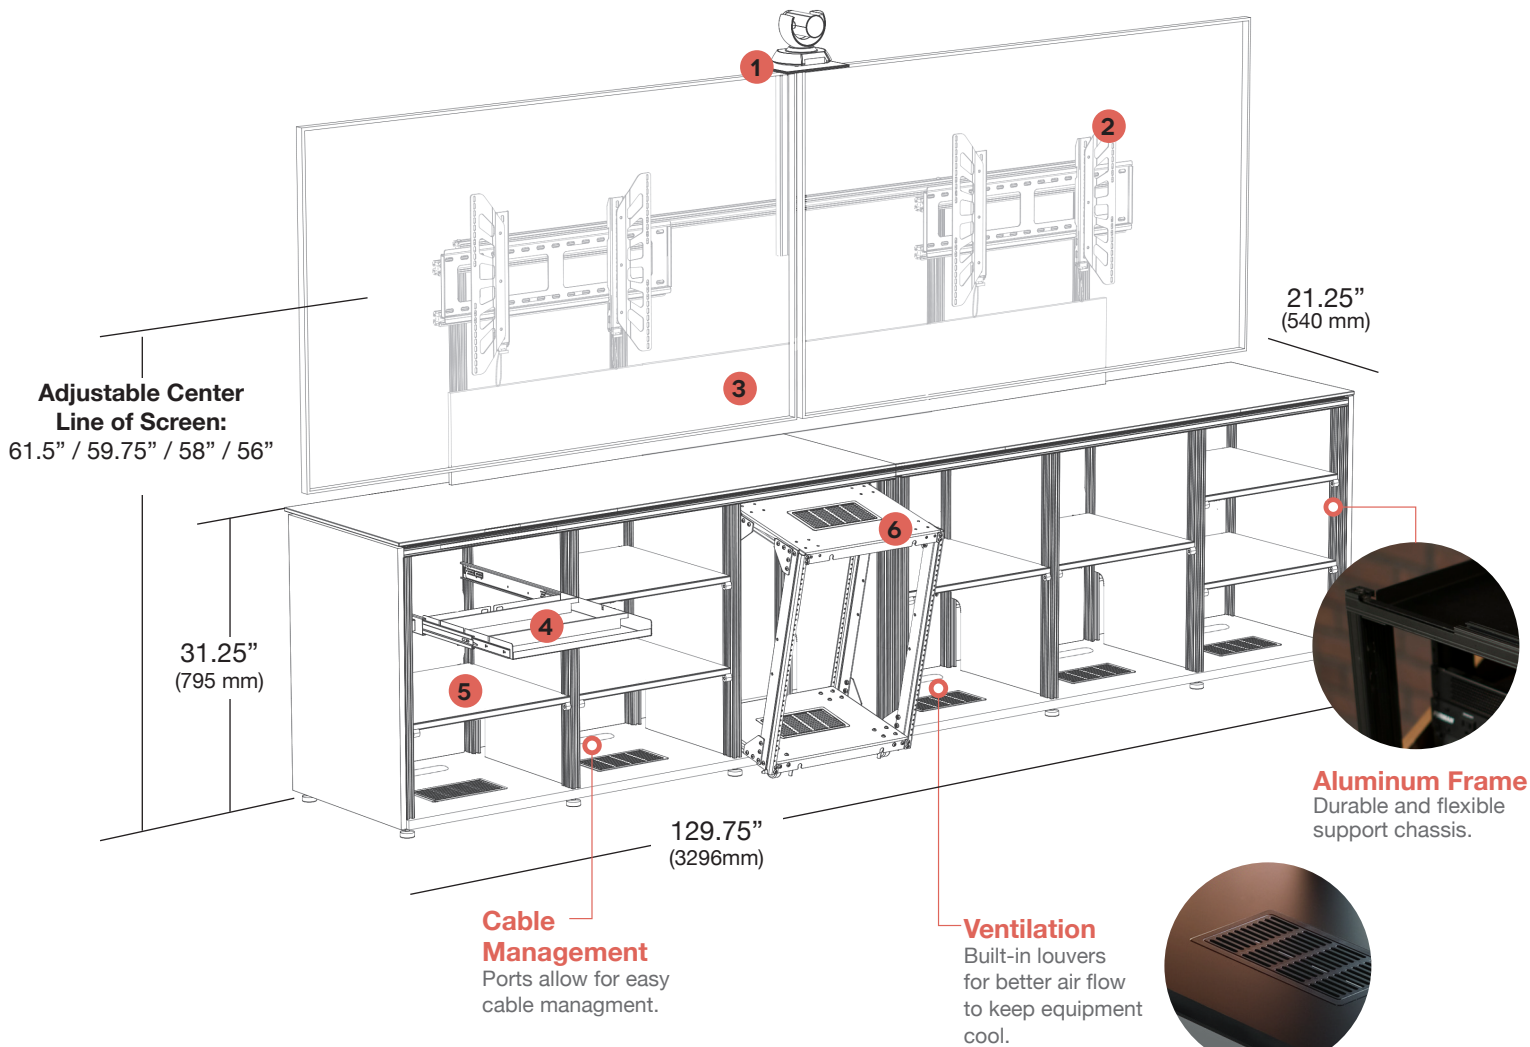

Aluminum Frame
Durable and flexible support chassis.



Ventilation
Built-in louvers for better air flow to keep equipment cool.

Cable Management
Ports allow for easy cable management.

*CREDENZA INCLUDES:


- 1. (1) Camera Shelf
- 2. (1) Dual Monitor Mount
- 3. (1) Black, Modesty Panel
- 4. (1) Pull-Out Storage Tray
- 5. (7) Adjustable Shelves
- 6. (1) 13-U Pull-Out Rack Cartridge
- 7. (1) Active Cooling Rear Panel
- 8. (5) Pinch-Out Rear Panels



Leveler Feet

Typical interior bay dimensions:

19.75"W (502 mm) x 27.75"H (705 mm)
x 19.5"D (495 mm)

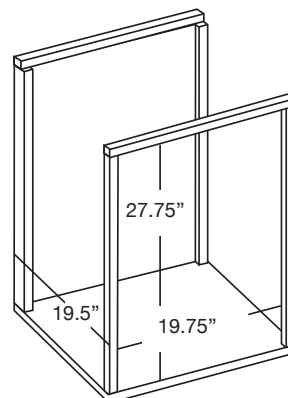


** Due to standard shipping constraints, cabinet ships as two cabinets with instructions to easily fasten. Special freight arrangements can be made to ship completely assembled.*



VIDEO INTEGRATION

Dual Monitor Mount

- Holds (2) 55-90", 175 lbs (80kg) ea
- Integrated mount with 11.75"H (298mm) black modesty panel
- Vesa Compliant: Horizontal 200 - 800 mm, Vertical 200 - 500 mm
- Adjustable mounting surface spaced at 5" min (127mm) distance from the wall. The width is adjustable to accommodate the screens listed. Overall height is 70" (1778mm) with wings and 65" (1651mm) to the top of the mount as shipped. all dimensions are subject to change based on style and feet.
- Adjustable Center Line of Screen: 61.5" (1562mm) / 59.75" (1518mm) / 58"(1473mm) / 56" (1422mm)

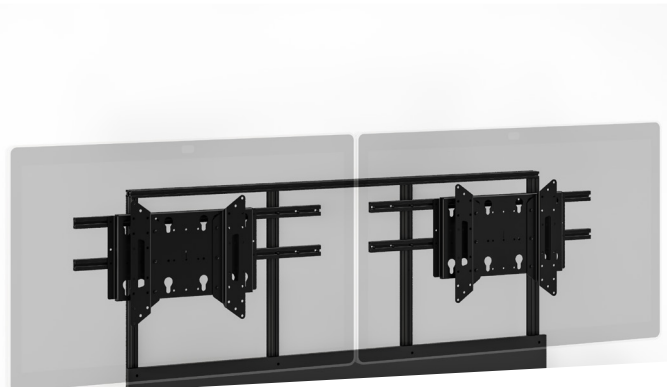

Camera Shelf


- Fully adjustable height.
- Single Shelf: 10"W (254mm) x 6"D (152mm) x .25"Th (6mm)
- Dual Shelf: 10"W (254mm) x 6"D (152mm) x .5"Th (13mm)
- Maximum Weight Capacity of 5 lbs (2 kgs)

Dual Camera Shelf Available
CA/CM/D

INTERIOR STORAGE

Pull-Out Storage Tray

- Storage tray with adjustable dividers (2), felt liner and integrated wire manager
- Utilizes heavy duty ball bearing slides, black steel body.
- Maximum Weight Capacity: 50 lbs (22.6 kgs)
- Measures: 17.25"W (438mm) x 16"D (406mm) x 1.625"H (42mm)

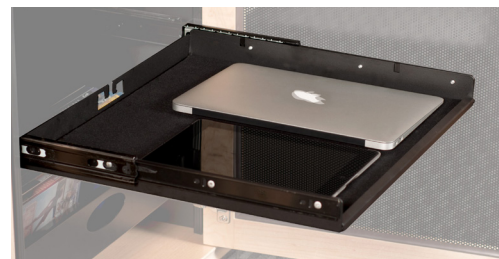

Adjustable Shelves (7 included)


- Fully adjustable
- Matte black, powder-coated MDF
- Maximum Weight Capacity: 75 lbs (34 kgs)
- Measures: 19.75"W (502mm) x 17.5"D (445mm) x .625" TH (16mm)





13-U PULL-OUT RACK CARTRIDGE

- 13 rack unit storage
- Pull-out 19" standard rack with rails front and back of the rack
- Cabinet guide rails and in-line caster base provide simple use and transport
- Weight capacity of 200 lbs (90.7 kgs)
- Heavy duty bearing wheels for easy installation, removal, and maneuvering of full equipment racks during service
- Rugged 12-gauge powder coated steel construction
- Flexible wire management wire loom allows for removal of rack from cabinet with 360 degrees of access to components without disconnecting from cabinet. An absolute step up from slide out and rotational racks service constraints
- Tool-less removal / installation for service
- Does not require cabinet to be attached to the wall or floor as other solutions.

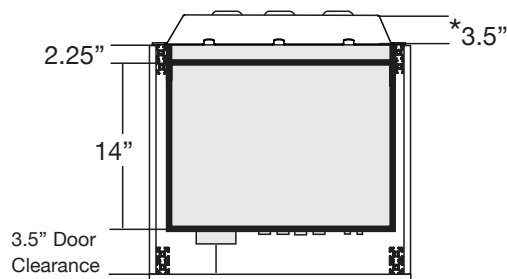

* When using optional Extended Rear Panel (sold separately).

Options Include:

- **Fan Kit** (FI/CR/AC) active cooling insert that provides front exhausting of heat to protect components.
- **Wire Lacing Bars** (RM/LB2)
- **14"D Vented Rack Shelves** (RM/VS2U, RM/VS3U, RM/VS4U)
- **Face Plates** (RM/VFP/1U, RM/VFP/2U, RM/VFP/3U, RM/VFP/4U,)



COOLING & ACCESS

Active Cooling Rear Panel

- Thermostatically controlled cooling system turns On at approx 80° F, maximum speed is reached at 95° F
- Automatic, low-noise cooling system with 22 dBA, quad 80 mm exhaust fans
- Air Flow: 26 CFM
- Exhaust Direction: Rearward
- Power Consumption: 1W in standby mode; 4 W in mid speed 8-10 W in full speed
- Thermistor: Remote with 20" lead
- Input: 100-240V / 50Hz-60Hz. International power plug available (#400-230 and 400-235)



Pinch-Out Rear Panels (5 included)

- Permits fast, easy access to components and wiring.





6 BAY, DUAL MONITOR CREDENZA

COLLABORATION FURNITURE

D2/367BM2/

BUNDLE SOLUTIONS

STYLES

We select the finest materials and finishes. Choose from sleek, hand-polished, high-gloss finishes to richly textured real wood fronts or a contemporary beveled edge style with a mix of materials. **If you are looking for something special please contact us to discuss custom options.**



BERLIN*
Wenge,
Wave-Texture Doors



CHICAGO*
Black Oak,
Grass-Textured Doors




DENVER – OAK*
Natural Oak,
Bark-Textured Doors



DENVER – WALNUT*
Medium Walnut,
Bark-Textured Doors




SEATTLE*
Gray Oak,
Bark-Textured Doors




ZURICH*
Opium Brown,
Linear Texture Doors



MILAN*
Dimensional, Diamond
Pattern, White



OSLO*
Black Oak Sides,
Black Glass Doors




MIAMI*
Gloss Warm White




BARCELONA, WHITE
Natural Walnut, Warm
White Doors,
Beveled-Edge Top



BARCELONA, BLACK
Natural Walnut,
Black Glass Doors,
Beveled-Edge Top




SIENNA*
Medium Walnut,
Flat-Front
Wood Doors




SIENNA*
Gray Walnut,
Flat-Front
Wood Doors



SIENNA*
Black Oak,
Flat-Front
Wood Doors



SIENNA*
Wenge Oak,
Flat-Front
Wood Doors



SIENNA*
Natural Oak,
Flat-Front
Wood Doors