

## max **TX™ SERIES**

### Model TX-AT1

### Audio Isolation Transformer

#### ANYWHERE YOU NEED...

- Studio Quality Audio Transformer
- Bifilar Winding, Nickel Alloy Core
- Protection for Inputs and Outputs
- Barrier Block Transformer Connections
- Galvanic Isolation
- 1:1 Transformer Coupling
- Balanced or Unbal Input and Output
- Transformer to Drive 600 Ohm Line
- Convenience of RDL TXs



#### **You Need The TX-AT1!**

The TX-AT1 is part of the group of versatile Max-TX series products from Radio Design Labs. Max-TX modules are the large format members of the RDL TX family, featuring the superior engineering and components common to RDL products. The durable adhesives provided with the TX-AT1 permit permanent or removable mounting. The TX-AT1 may be rack or surface mounted with optional TX series accessories.

**APPLICATION:** The TX-AT1 is the ideal choice in many applications requiring studio quality transformer coupling between balanced or unbalanced audio equipment and a balanced or unbalanced line.

The TX-AT1 is a single-channel (mono) module featuring barrier block connections for the input and output. A studio-quality audio transformer couples the audio input to the audio output. A common ground terminal is connected to the TX-AT1 metal support structure.

A 1:1 audio transformer provides galvanic isolation. The audio transformer has 600 Ohm primary and secondary bifilar windings, though is optimized to be driven from a low-impedance source into a bridging load. The primary and/or secondary may be wired unbalanced, providing conversion between balanced and unbalanced audio lines. The TX-AT1 delivers the wideband audio, ultra-low distortion, audio clarity and headroom common to studio equipment in a module suited to both studio and general-purpose audio installations.

The TX-AT1's compact size permits mounting in a variety of spaces and in various locations in equipment racks. The TX-AT1 may be mounted where needed, to rack sides or in an equipment rack (either the front or rear rack rails) using a variety of available RDL mounting options. Use the TX-AT1 individually, or combine it with other RDL products as part of a complete audio/video system.


max **TX™ SERIES**

**Model TX-AT1**

**Audio Isolation Transformer**

**Installation/Operation**

**CE** EN55103-1 E1-E5; EN55103-2 E1-E4  
Typical Performance reflects product at publication time exclusive of EMC data, if any, supplied with product. Specifications are subject to change without notice.

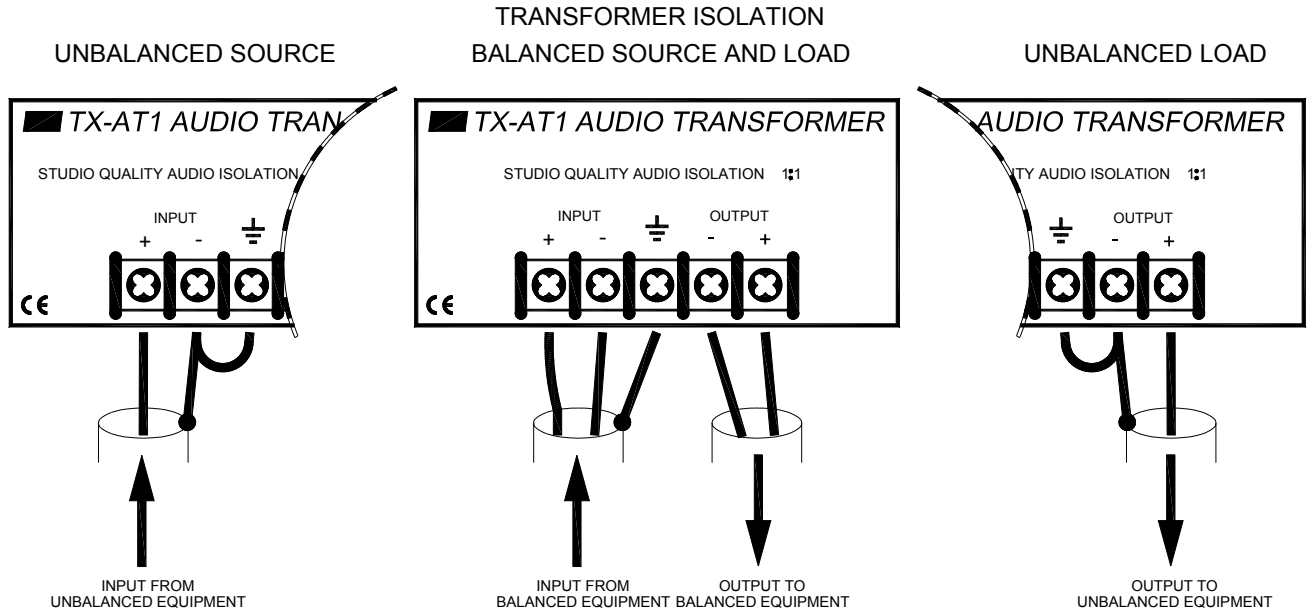

**TYPICAL PERFORMANCE**

Input Connector:	Barrier block
Input Level:	+4 dBu; +22 dBu maximum
Output Connector:	Barrier block
Output Level:	+4 dBu (less insertion loss)
Impedance Ratio:	600:600
Turns Ratio:	1:1
Core:	Nickel alloy
Frequency Response:	20 Hz to 20 kHz (+/- 0.1 dB)
THD:	<0.035% (50 Hz to 20 kHz, +4 dBu input) 0.001% (Typ. 1 kHz, +4 dBu input) 0.09% (Typ. 20 Hz, +4 dBu input)
Insertion Loss:	0.25 dB (20 Ohm source; 10 kΩ load) 2 dB (20 Ohm source; 600 Ω load)
CMRR:	>85 dB (balanced input, 50 to 60 Hz)
Power Requirement:	Passive
Overall Dimensions:	3.17" (8.0 cm) W; 1.75" (4.45 cm) H; 2.06" (5.23 cm) D
EMC:	<b>CE</b>