

3G ULTRA 515POE Receiver

VBS-HDIP-515POE

Just Add
Power

KVM Support and Stereo Out 1080p Receiver

The 515POE Receiver combines the enhanced audio and feature-set of the 3G Ultra system with the maximum 1080p resolution of 2G Omega devices.

In 3G Ultra systems, the 2GΩ/3G Receiver provides a lower-cost solution for sources that output 1080p resolution or lower.

The 515POE receives and processes a 1080p or lower-resolution source from a Just Add Power Transmitter and distributes video to the designated display; provides KVM support, integrated endpoint control and image play features; supports all lossless audio and HDCP 2.2; along with with all the 1080p Receiver system wide features from the 3G Ultra product line.



Features


Image Pop	Display a custom logo or message as an overlay on any active screen	KVM Support	Provide local and remote access to all computers on the system with a built-in keyboard, mouse and touchscreen interface at both ends of a connection.
Image Push	Load a custom default image or logo for when no source is displayed onscreen	Scalability	Fully compatible with all 3G Ultra and 2G Omega products
Image Pull	Preview an image from any source or display in any web browser or control system - up to 10 fps	Video Rotation	Rotate your video by 90° for portrait or landscape display

3G ULTRA 515POE Receiver

VBS-HDIP-515POE


Just Add
Power

Front of Device:

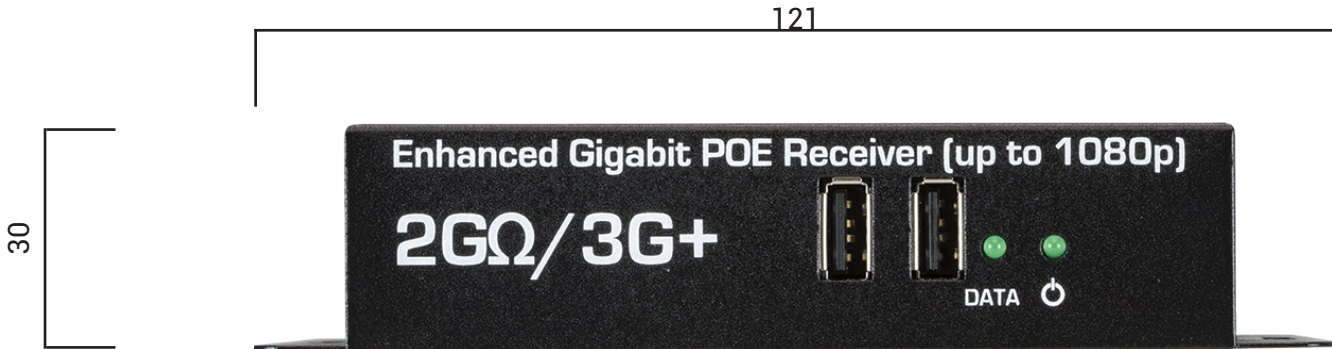

All measurements in millimeters (mm)

Back of Device:

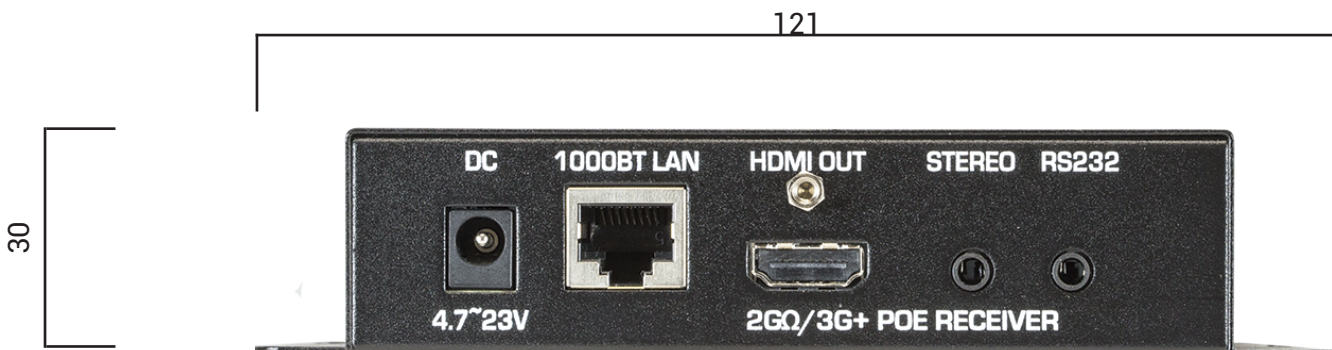

All measurements in millimeters (mm)

Specifications

Bandwidth	180-500 Mbps	POE	10 watts maximum
Compliance	HDCP 2.2 RoHS/FCC/CE	Ports	Gigabit Ethernet HDMI Out 3.5mm Stereo Out 3.5mm RS232 w/null modem USB 2.0
Dimensions & Weight	158 x 30 x 127 mm 6.2" x 1.2" x 5.0" inch 0.36 kg / 0.8 lb	Power Supply (not included)	~4.7-23V 5.5mm/2.1mm, Positive tip
Encryption	Hardware-Based AES 256-bit Encryption of network video signal	Supported Resolutions	Up to 1920x1200 (interlaced & progressive)
Operating Temp	0-60 °C / 32-140 °F		