

# 3G ULTRA 718AVP Transmitter


VBS-HDIP-718AVP

Just Add  
**Power**

## Dolby Digital 5.1 Downmix with Stereo Out & USB

The 3G Ultra 718AVP Transmitter distributes 4K video over a single Cat5e cable, along with Dolby Digital 5.1.

Distribute Dolby Pro Logic II audio to pass multichannel audio to multichannel zones and stereo audio to 2-channel zones. The 718AVP encodes a 4K or lower-resolution source device into an IP signal and sends it over the network with ultra-low latency and instant switching; and supports USB 2.0 and KVM; along with all the 4K system wide features from the 3G Ultra product line.

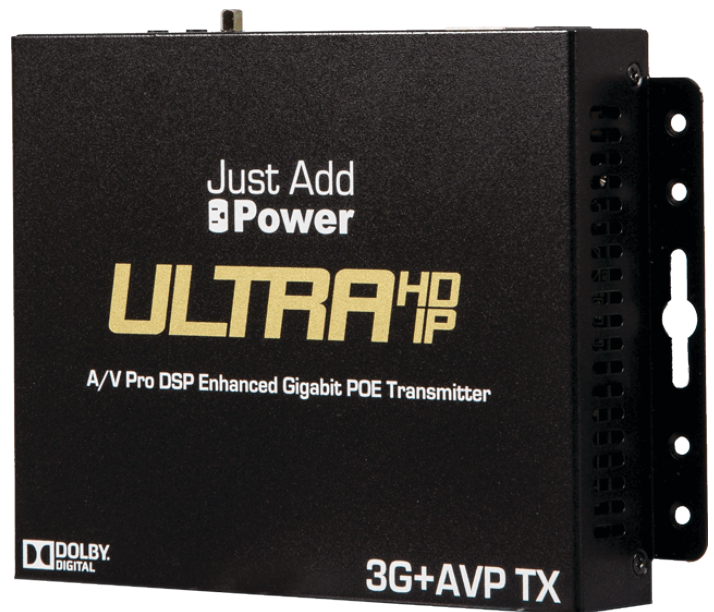

### Features


<b>Audio</b>	Dolby Digital 5.1 & stereo simultaneously  Analog audio mixable with HDMI audio  Stereo audio output 3.5mm  Adjustable volume & delay	<b>Image Pull</b>	Preview an image from any source or display in any web browser or control system - up to 10 fps
<b>HDCP 2.2 Support</b>	Display content with HDCP 2.2 copy/content protection on any HDMI screen in system	<b>Integrated Endpoint Control</b>	Control endpoints with RS232, CEC and IR
		<b>Scalability</b>	Fully compatible with all 3G Ultra and 2G Omega products

# 3G ULTRA 718AVP Transmitter

VBS-HDIP-718AVP

Just Add  
**Power**

## Front of Device:

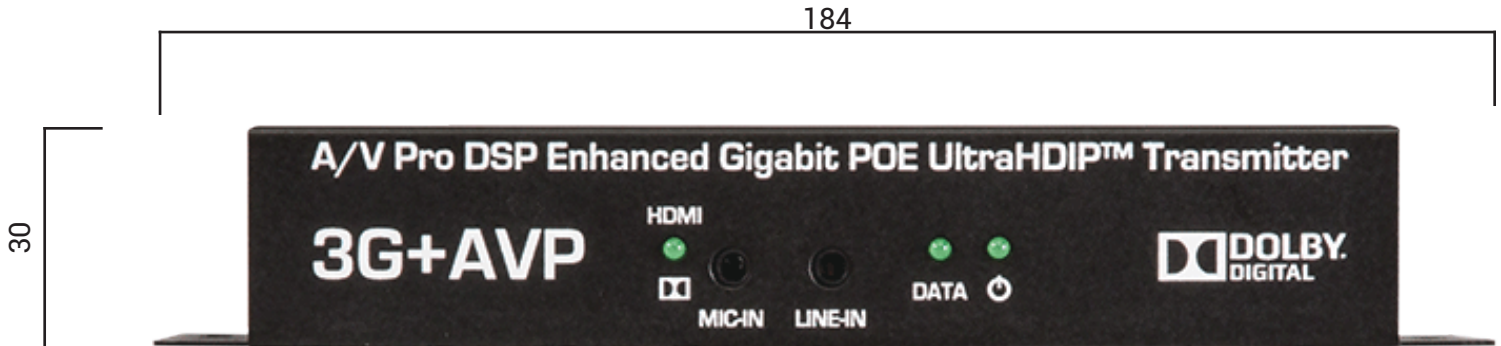

All measurements in millimeters (mm)

## Back of Device:



All measurements in millimeters (mm)

## Specifications

<b>Bandwidth</b>	180-500 Mbps	<b>POE</b>	10 watts maximum
<b>Compliance</b>	HDCP 2.2 RoHS/FCC/CE	<b>Ports</b>	Gigabit Ethernet HDMI In 3.5mm Line-In 3.5mm Mic-In 3.5mm Stereo Out 3.5mm RS232 w/ null modem Micro-USB 2.0
<b>Dimensions &amp; Weight</b>	184 x 30 x 126 mm 7.2" x 1.2" x 5.0" in 0.45 kg / 1.0 lb	<b>Power Supply (not included)</b>	~4.7 - 23V 5.5mm/2.1mm, Positive tip
<b>Encryption</b>	Hardware-Based AES 256-bit Encryption of network video signal	<b>Supported Resolutions</b>	Up to 4096x2160 (interlaced & progressive)
<b>Operating Temp</b>	0-60 °C / 32-140 °F		