

3G ULTRA 725POE Transmitter

VBS-HDIP-725POE

Just Add
Power

SDI Input, HDMI Loopout, and Stereo Out Transmitter

The 725POE Transmitter adds SDI support, HDMI loopout and stereo out to to any Just Add Power video distribution system.

Add a SDI source to your HD over IP system without the need for an SDI-HDMI converter.

The 725POE Transmitter encodes a 1080p or lower source device into an IP signal and sends it over the network with ultra-low latency and instant switching; and features image pull, stereo output with audio delay, and RS232 and IR control of sources.



Features


Audio	Supports 48kHz audio sample rate, 8 channels, 16~24 bits Analog audio output	Image Pull	Preview an image from any source or display, in any web browser or control system, at up to 10 fps
HDMI	HDMI pass-through	Scalability	Fully compatible with all 3G Ultra and 2G Omega products
Integrated Endpoint Control	Control endpoints with RS232 and IR		

3G ULTRA 725POE Transmitter

VBS-HDIP-725POE


Just Add
Power

Front of Device:

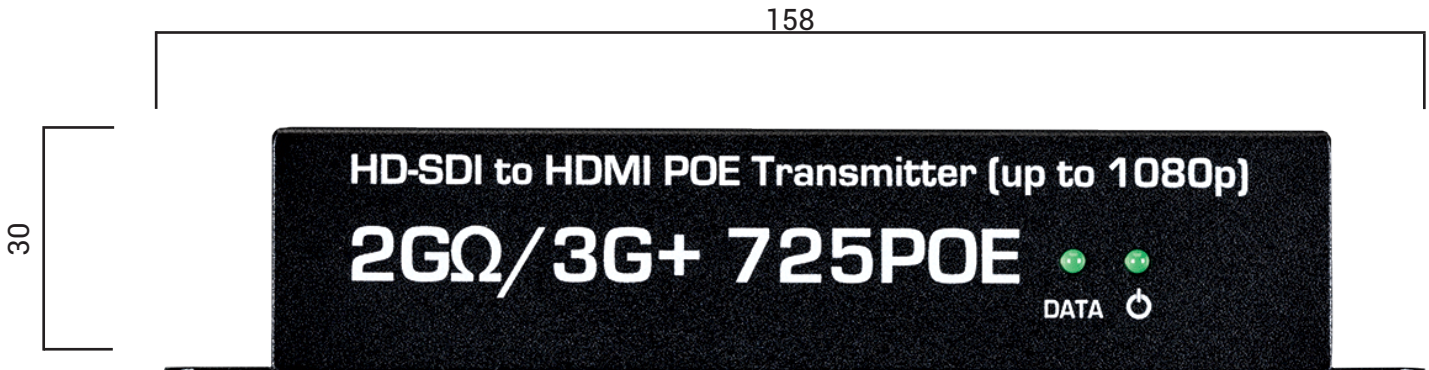

All measurements in millimeters (mm)

Back of Device:

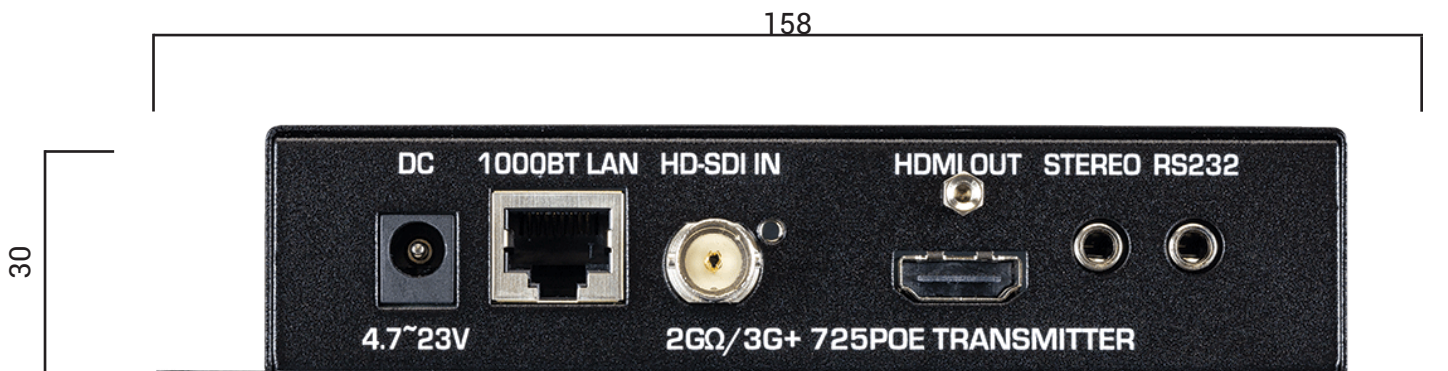

All measurements in millimeters (mm)

Specifications

Bandwidth	180-500 Mbps	POE	10 watts maximum
Compliance	RoHS/FCC/CE	Ports	Gigabit Ethernet SDI In HDMI Out 3.5mm Stereo Out 3.5mm RS232 w/null modem
Dimensions & Weight	158 x 30 x 125 mm 6.2" x 1.2" x 4.9" inch 0.54 kg / 1.2 lb	Power Supply (not included)	DC5V, 2A minimum 5.5mm/2.1mm, Positive tip
Encryption	Hardware-Based AES 256-bit Encryption of network video signal	Supported Resolutions	Up to 1080p 50/60Hz PC: 1920x1200 SDI: SD/HD/3G
Operating Temp	0-60 °C / 32-140 °F		