

# 3G ULTRA 726TVI Transmitter

VBS-HDIP-726TVI

Just Add  
**Power**

## TVI Input, HDMI Loopout, and KVM Support Transmitter

The 726TVI Transmitter adds TVI support, HDMI loopout and USB 2.0 to any Just Add Power video distribution system.

**Add a TVI source to your HD over IP system without the need for an TVI-HDMI converter.**

The 726TVI Transmitter encodes a 1080p or lower source device into an IP signal and sends it over the network with ultra-low latency and instant switching; and features image pull and KVM support.



### Features


<b>Audio</b>	Line-in for injecting audio	<b>KVM Support</b>	Provide local and remote access to all computers on the system with a built-in keyboard, mouse and touchscreen interface at both ends of a connection
<b>HDMI</b>	HDMI pass-through	<b>Scalability</b>	Fully compatible with all 3G Ultra and 2G Omega products
<b>Image Pull</b>	Preview an image from any source or display, in any web browser or control system, at up to 10 fps		

# 3G ULTRA 726TVI Transmitter

VBS-HDIP-726TVI


Just Add  
**Power**

## Front of Device:

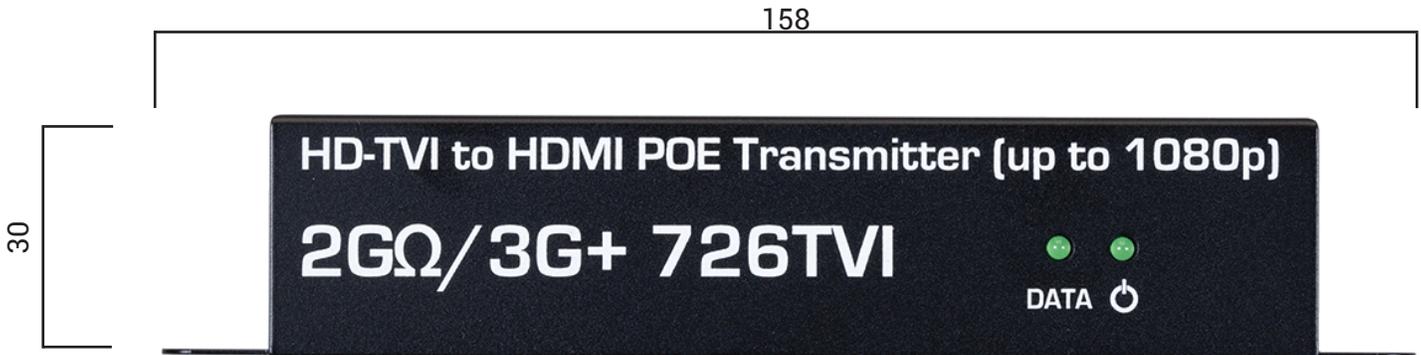

All measurements in millimeters (mm)

## Back of Device:

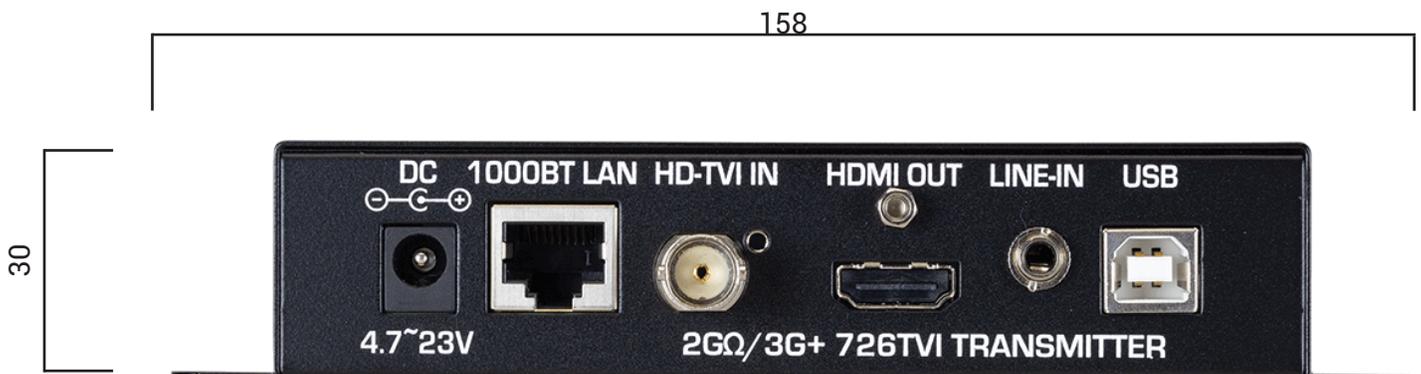

All measurements in millimeters (mm)

## Specifications

<b>Bandwidth</b>	180-500 Mbps	<b>POE</b>	10 watts maximum
<b>Compliance</b>	RoHS/FCC/CE	<b>Ports</b>	Gigabit Ethernet HDE-TVI In HDMI Out 3.5mm Line-In USB 2.0 Type B
<b>Dimensions &amp; Weight</b>	159 x 30 x 124 mm 6.3" x 1.2" x 4.9" inch 0.36 kg / 0.8 lb	<b>Power Supply (not included)</b>	DC5V, 2A minimum 5.5mm/2.1mm, Positive tip
<b>Encryption</b>	Hardware-Based AES 256-bit Encryption of network video signal	<b>Supported Resolutions</b>	Up to 1080p
<b>Operating Temp</b>	0-60 °C / 32-140 °F		