3G ULTRA 718 Wallplate Transmitter

VBS-HDIP-718WP4

Dolby Digital 5.1 Downmix with Stereo Out, USB & VGA Wallplate

Just Add

RPower



The 3G Ultra 718WP4 Wallplate Transmitter fits into a 4-gang construction box and provides multiple video and audio inputs and outputs to any Just Add Power video distribution system.

Distribute Dolby Digital 5.1 audio to every zone and transform to stereo audio for 2-channel zones. Mix-and-match the 3G Ultra 718WP4 Transmiter with any 3G Ultra or 2G Omega models to distribute any source to any zone.


Audio	Dolby 5.1 Downmixing	KVM Support	Provide local and remote access to all computers on the system	
	Stereo Audio Output 3.5mm		with a built-in keyboard, mouse and touchscreen interface at both ends of a connection	
Colors	Black, White or Custom	Scalability	Fully compatible with all 3G Ultra and 2G Omega products	
HDCP 2.2 Support	Display content with HDCP 2.2 copy/content protection on any HDMI screen in system			

Features

3G ULTRA 718 Wallplate Transmitter

Just Add

VBS-HDIP-718WP4

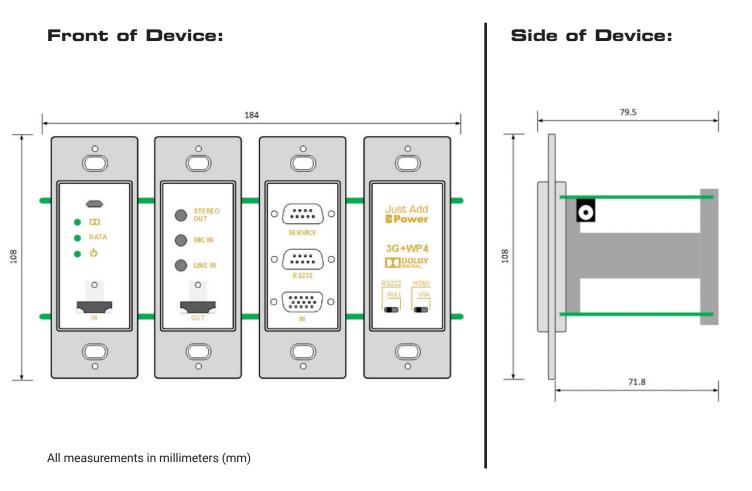

Specifications

Bandwidth	180-500 Mbps	POE	10 watts maximum
Compliance	HDCP 2.2 RoHS/FCC/CE	Ports	Gigabit Ethernet HDMI In HDMI Out
Dimensions & Weight	108 x 184 x 79.5 mm 4.3" x 7.2" x 3.1" inch 0.27kg / 0.6 lb		3.5mm Line-In 3.5mm Mic-In 3.5mm Stereo Out DB9F RS232 w/ null modem
Encryption	Hardware-Based AES 256-bit Encryption of network video signal		DB9M Service port Micro-USB 2.0 5.5mm/2.1mm barrel
Operating Temp	0-60 °C / 32-140 °F	Power Supply (not included)	~4.7-23V 5.5mm/2.1mm, Positive tip
		Supported Resolutions	Up to 4096x2160 (interlaced & progressive)