SMART IP PANIC BUTTON
VISIBLE

DATA SPECIFICATION SHEET

PART NUMBER: IPBTN-VIS

CATEGORY: SMART BUTTONS

PRODUCT OVERVIEW

Initiate an instant emergency notification or lockdown procedure anywhere within a facility with our Smart IP Panic Button (IPBTN-VIS). As a PoE endpoint, it connects to the facility network as part of a mass notification system. It can signal an alert with a push of the button. It can also dial a phone number with a pre-recorded message.

The IPBTN-VIS easily integrates with VoIP phone systems and approved third-party software. ClockWise Campus software is included.

FEATURES

> **Cover**

Reduces risk of false alarms, molded from durable polycarbonate material, UV-stabilized to stay clear and visible

> **Mounting**

Designed for placement in hallways, classrooms, or any open areas for quick alerting

> **Illuminated Button**

Illumination and blinking to indicate status

> **SIP Integration**

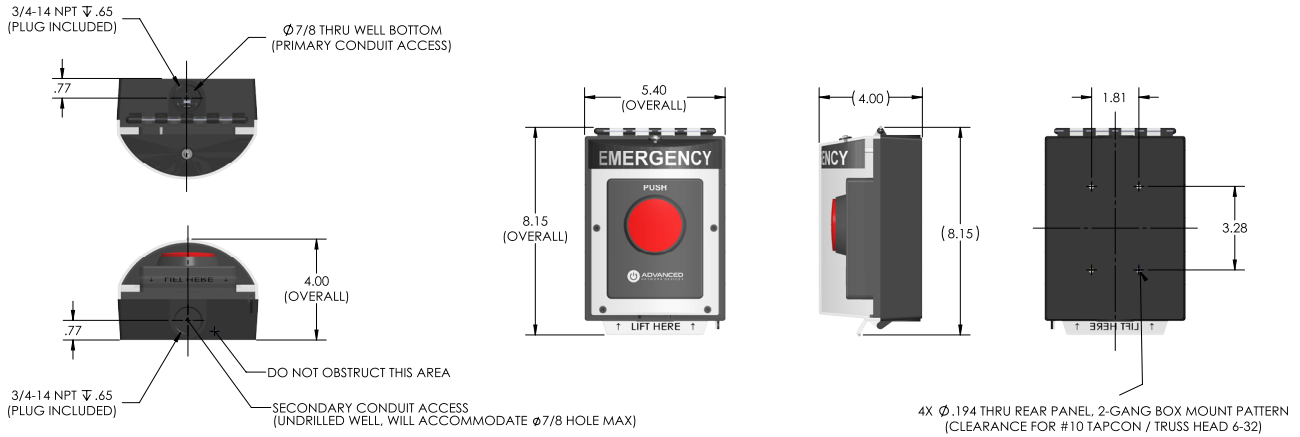SIP-enabled to dial a pre-programmed phone number with an optional pre-recorded message

> **Software**

ClockWise Campus software included, and compatible with approved third-party mass notification systems

> **Gunshot Detection**

Compatible with our VigilarGSD system

ADVANCED
NETWORK DEVICES

DIMENSIONS

3/4-14 NPT ⤵ .65
(PLUG INCLUDED)

.77

Ø7/8 THRU WELL BOTTOM
(PRIMARY CONDUIT ACCESS)

4.00
(OVERALL)

.77

3/4-14 NPT ⤵ .65
(PLUG INCLUDED)

DO NOT OBSTRUCT THIS AREA

SECONDARY CONDUIT ACCESS
(UNDRILLED WELL, WILL ACCOMMODATE ⌀7/8 HOLE MAX)

5.40
(OVERALL)

8.15
(OVERALL)

EMERGENCY
PUSH

LIFT HERE

4.00

(8.15)

1.81

3.28

LIFT HERE

4X ⌀.194 THRU REAR PANEL, 2-GANG BOX MOUNT PATTERN
(CLEARANCE FOR #10 TAPCON / TRUSS HEAD 6-32)

NOTES: ALL UNITS ARE INCHES UNLESS OTHERWISE SPECIFIED.

SPECIFICATIONS

Category	Specifications
Power Input	PoE (IEEE802.3af) 15.4 W
Ethernet I/F	10/100 Mbps
Supported Protocols	SIP, IPv4, IPv6, 802.1X, HTTP, SLP, TFTP, NTP, SNMPV1, SNMPV2c, SNMPV3, DHCP, IGMP, ICMP, TCP/IP, LLDP-MED, UDP, MDNS & MDNS-SD
Plastic Case Molding	Polycarbonate
Operating Temperature	14˚ TO 122˚ F (-10˚ TO 50˚ C)
Dimensions	5.4" W x 8.15" H x 4" D
Weight	30 oz (850 g)
Warranty	2 Year Limited

Disclaimer: While the base box/cover utilized in this device is UL certified, and the electronics and firmware used in this device are in other UL or ETL certified AND products, the present device is not UL certified because of its intelligent, unique nature, and broad application scope, making certification testing not possible at this time.

Designed and made in the USA