

## 2x4 USB-C SWITCH

### 2x4 USB-C Switch with 2 USB-C Inputs to 2 USB-C and 2 USB-A Device Ports – USB 3.2 GEN 1 (5GBPS)

C2G's USB-C Switch offers a seamless solution for managing four USB devices from two different sources. It's perfect for classrooms, conference rooms, and other environments with multiple PCs and devices. You can switch between two USB-C sources and two USB-C or USB-A devices either automatically, by detecting a new source, or manually via the front panel button or RS-232 API commands. Supporting USB 3.2 Gen 1 with data transfer rates up to 5 Gbps, this plug-and-play device is compatible with a wide range of USB peripherals, including webcams, PTZ cameras, keyboards, mice, printers, displays, and more.



### FEATURES

- Two USB-C ports for host PC connection
- Two USB-C ports and two USB-A ports for connecting devices
- Supports USB 3.2 Gen 1 with data transfer speeds up to 5Gbps
- Backward compatible with USB 2.0 and 1.1
- RS-232 port for integration with control systems
- Supports auto-switching when new devices are detected or manual switching via the front panel button or RS-232 API commands
- Compatible with a broad range of USB sources and devices

ITEM	DESCRIPTION
C2G54263	2x4 USB-C Switch with 2 USB-C Inputs to 2 USB-C and 2 USB-A Device Ports - USB 3.2 Gen 1 (5Gbps)

# 2x4 USB-C SWITCH

2x4 USB-C Switch with 2 USB-C Inputs to 2 USB-C and 2 USB-A Device Ports – USB 3.2 GEN 1 (5GBPS)


## SPECIFICATIONS

		C2G54263
PHYSICAL CHARACTERISTICS	Housing	Aluminum alloy
	Color	Black
	Dimensions (WxDxH)	4.92 x 3.15 x 1.18 in (125 x 80 x 30 mm)
PHYSICAL SPECIFICATIONS	Operating Temperature	32°F- 104°F (0 °C-40 °C)
	Storage Temperature	-4°F - 140°F(-20°C - 60°C)
PORTS	Input	2X USB-C Female Current: 5A for VBUS
	DB9 connector	RS-232 Control
	Regulatory approvals	2011/65/EU RoHS2
	Output	2x USB-A female, 2x USB-C female Contact Terminal: Gold Flash Shell: Nickel Plated Insulation: Black
POWER ADAPTER	Cable Length	4.9 ft (1.5 m)
	Electrical Input	100-240 VAC, 50-60 Hz, 1.5 A
	Electrical Output	12 VDC, 3A

# 2x4 USB-C SWITCH

2x4 USB-C Switch with 2 USB-C Inputs to 2 USB-C and 2 USB-A Device Ports – USB 3.2 GEN 1 (5GBPS)

## TECHNICAL DRAWING

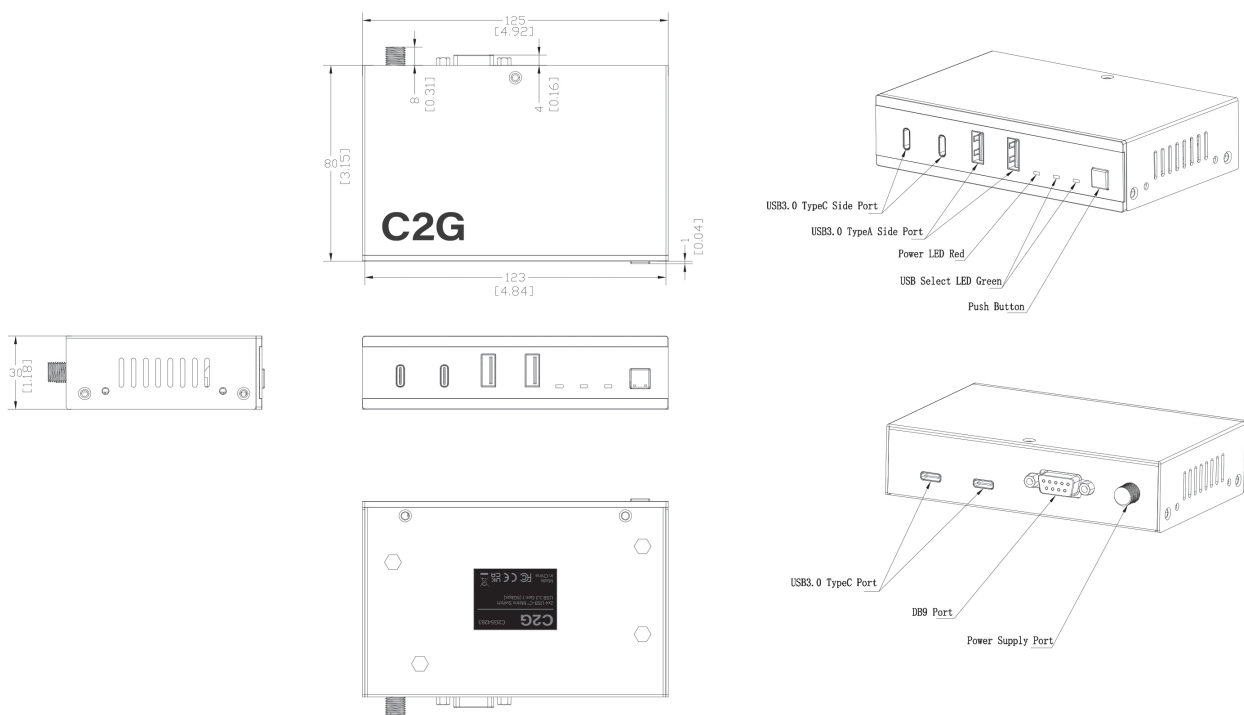

LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

### SIMPLIFIED CONNECTIVITY

USA 800.506.9607 customer-service@c2g.com

APAC +852 2145 4099 av.asia.sales@legrand.com

EMEA +31 495 580 840 c2g.emea@av.legrand.com

©2024 Legrand AV Inc. 240690 Rev A 9/24 C2G is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.