

#### **COLLABORATION FURNITURE**

## PRECONFIGURED SOLUTIONS



# 3 BAY, DEEP PROFILE CABINET

#### D3/337B/


This robust, large-capacity cabinet system houses all electronics, including integrated support for AV and IT systems. Freestanding and fully-integrated, this cabinet is perfect for retrofit installations, allowing for quick and efficient installation without involving additional tradespeople to install electrical wiring or reinforce walls.









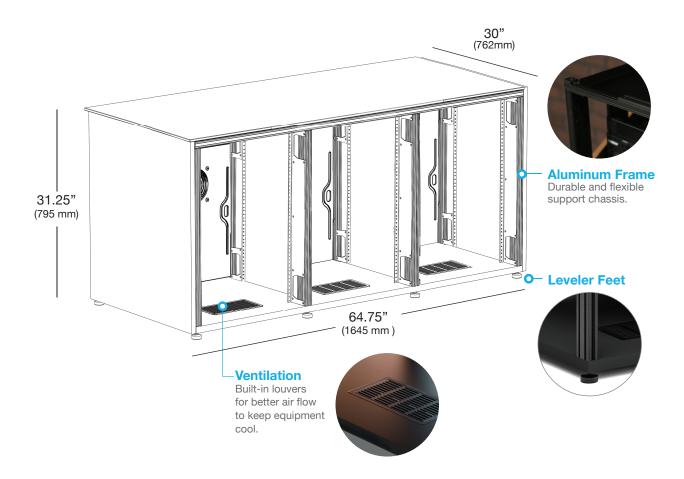


## **CABINET INCLUDES:**

- 1. (12) 15-U Rack Rails
- 2.(1) Active Cooling Rear Panel
- 3.(2) Removable Rear Panels
- 4.(6) Lacing Bars

# **Typical interior bay dimensions:**


19.75"W (502 mm) x 27.75"H (705 mm) x 28.5"D (724mm)






# 15-U RACK RAILS

- · Frame-Mounted, 15-U Rack Rails are affixed to cabinet's aluminum frame
- · Rails are compatible with all industry standard 19" components and accessories
- · Wire manager, lacing bars included (2)
- Hole pattern is a standard 19 EIA rack mount pattern allowing for mounting of equipment with attachment holes either wide or universally spaced.
- · Threaded for 10-32 screws
- · Black powder coated steel



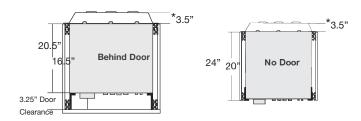

SalamanderDesigns.com/Commercial | 800.535.9910

©2016 Salamander Designs Ltd.



# **ADD ON ACCESSORIES**



## **Vented Shelves**

RM/VS2U	Vented Shelf, 2U - 14"D
RM/VS3U	Vented Shelf, 3U - 14"D
RM/VS4U	Vented Shelf, 4U - 14"D


- Mounts to Pull-Out Rack Cartridge and any 19" standard rack
- 19" EIA standard rack mount, 14" deep, vented shelf
- Black powder coated steel.



# **Wire Lacing Bars for Cartridge**

RM/LB2	Pull-Out Rack Cartridge Lacing Bar, Set of 2
--------	--

- Mounts to Rack Cartridge and any 19"standard rack
- Infinitely adjustable wire management
- Includes one velcro wrap strap
- Black powder coated steel



#### **Face Plates**

RM/VFP1U	Vented Face Plate, 1U
RM/VFP2U	Vented Face Plate, 2U
RM/VFP3U	Vented Face Plate, 3U
RM/VFP4U	Vented Face Plate, 4U

- Mounts to Pull-Out Rack Cartridge and any 19" standard rack
- Black powder coated steel
- Perforated 16ga steel for component air flow (allows 62% free air flow)

D3/337B/

# **COOLING & ACCESS**

### **Active Cooling Rear Panel**

- Thermostatically controlled cooling system turns On at approx 80° F, maximum speed is reached at 95° F
- · Automatic, low-noise cooling system with 22 dBA, quad 80 mm exhaust fans
- · Air Flow: 26 CFM
- · Exhaust Direction: Rearward
- · Power Consumption: 1W in standy mode; 4 W in mid speed 8-10 W in full speed
- · Thermistor: Remote with 20" lead
- Input: 100-240V / 50Hz-60Hz. International power plug available (#400-230 and 400-235)





## Pinch-Out Rear Panels (3 included)

· Permit fast, easy access to components and wiring.





D3/337B/

#### PRECONFIGURED SOLUTIONS

# **STYLES**

We select the finest materials and finishes. Choose from sleek, hand-polished, high-gloss finishes to richly textured real wood fronts or a contemporary beveled edge style with a mix of materials. If you are looking for something special please contact us to discuss custom options.



MILAN / WHITE
White, 3-D Diamond Pattern
Doors with 1/2" (12mm) White,
Solid Surface
D3/337B/ML/WH/WH



MILAN / BLACK
White, 3-D Diamond Pattern
Doors with 1/2" (12mm) Black,
Solid Surface
D3/337B/ML/WH/BK



MIAMI / BLACK Gloss Warm White Door, Doors with 1/2" (12mm) Black, Solid Surface D3/337B/MM/GW



MIAMI / WHITE
Gloss Warm White Door,
Doors with 1/2" (12mm) White
Solid Surface
D3/337B/MM/GW/WH



DENVER - OAK
Natural Oak, Bark-Textured
Doors with 1/2" (12mm) Black,
Solid Surface
D3/337B/DV/NO



DENVER - WALNUT
Medium Walnut, Bark-Textured
Doors with 1/2" (12mm) Black,
Solid Surface
D3/337B/DV/MW



CHICAGO
Black Oak,Grass-Textured
Doors with 1/2" (12mm) Black,
Solid Surface
D3/337B/CH/BO



OSLO
Black Oak Sides, Black Glass
Doors with 1/2" (12mm) Black,
Solid Surface
D3/337B/OS/BG



ZURICH
Linear Texture - Opium Brown
Doors with 1/2" (12mm) Black,
Solid Surface
D3/337B/ZU/OB



BERLIN
Wenge, Wave-Texture
Doors with 1/2" (12mm) Black,
Solid Surface
D3/337B/BL/WE

