

COLLABORATION FURNITURE

BUNDLE SOLUTIONS



4 BAY CREDENZA

D2/347A/

This robust, large-capacity cabinet system houses all electronics, including integrated support for AV and IT systems. Freestanding and fully-integrated, credenza is perfect for retrofit installations, allowing for quick and efficient installation without involving additional tradespeople to install electrical wiring or reinforce walls.










*Barcelona Models 86.5"W x 34.5"H x 22"D 2197mm x 876mm x 559mm

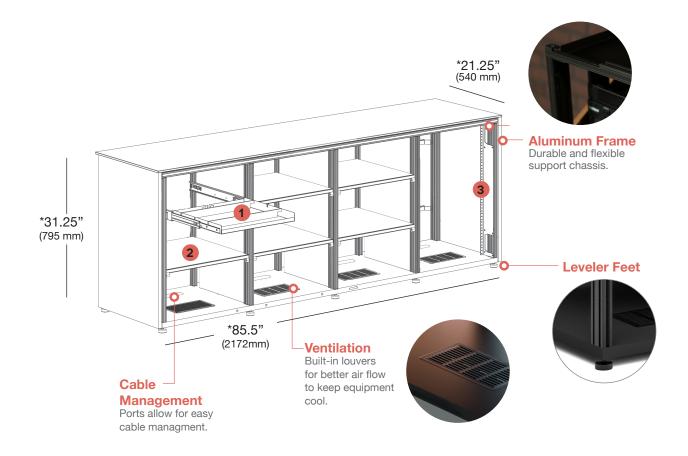


*CREDENZA INCLUDES:

- 1. (1) Pull-Out Storage Tray
- 2. (5) Adjustable Shelves
- 3. (1) 15-U Rack Rails & (2) Lacing Bars
- 4. (1) Active Cooling Rear Panel
- 5. (3) Pinch-Out Rear Panels

Typical interior bay dimensions:

19.75"W (502 mm) x 27.75"H (705 mm) x 19.5"D (495 mm)





INTERIOR STORAGE

Pull-Out Storage Tray

- Storage tray with adjustable dividers (2), felt liner and integrated wire manager
- Utilizes heavy duty ball bearing slides, black steel body.
- · Maximum Weight Capacity: 50 lbs (22.6 kgs)
- Measures: 17.25"W (438mm) x 16"D (406mm) x 1.625"H (42mm)



Adjustable Shelves (5 included)

- · Fully adjustable
- · Matte black, powered-coated MDF
- · Maximum Weight Capacity: 75 lbs (34 kgs)
- Measures: 19.75"W (502mm) x 17.5"D (445mm) x .625" TH (16mm)





15-U RACK RAILS


4 BAY, CREDENZA


- · Frame-Mounted, 15-U Rack Rails are affixed to cabinet's aluminum frame
- · Rails are compatible with all industry standard 19" components and accessories
- · Wire manager, lacing bars included (2)
- Hole pattern is a standard 19 EIA rack mount pattern allowing for mounting of equipment with attachment holes either wide or universally spaced.
- · Threaded for 10-32 screws
- · Black powder coated steel

3.25" Door Clearance

Add On:

- · Cabinet Mounted Wire Lacing Bars FI/RMLB
- · Full-height and component-height rack rails. Can be mounted to rear of cabinet. FI/RM2U, FI/RM/3U, FI/RM40, FI/630/RMK/A, FI/620/RMK/A





* When using optional Extended Rear Panel (sold separately).



COOLING & ACCESS

Active Cooling Rear Panel

- Thermostatically controlled cooling system turns
 On at approx 80° F, maximum speed is reached at 95° F
- Automatic, low-noise cooling system with 22 dBA, quad 80 mm exhaust fans
- · Air Flow: 26 CFM
- · Exhaust Direction: Rearward
- Power Consumption: 1W in standy mode;
 4 W in mid speed 8-10 W in full speed
- · Thermistor: Remote with 20" lead
- Input: 100-240V / 50Hz-60Hz. International power plug available (#400-230 and 400-235)





Pinch-Out Rear Panels (3 included)

· Permit fast, easy access to components and wiring.



BUNDLE SOLUTIONS

STYLES

We select the finest materials and finishes. Choose from sleek, hand-polished, high-gloss finishes to richly textured real wood fronts or a contemporary beveled edge style with a mix of materials. If you are looking for something special please contact us to discuss custom options.



BERLIN*
Wenge,
Wave-Texture Doors



CHICAGO*
Black Oak,
Grass-Textured Doors



DENVER – OAK*Natural Oak,
Bark-Textured Doors



DENVER – WALNUT* Medium Walnut, Bark-Textured Doors



SEATTLE*Gray Oak,
Bark-Textured Doors



ZURICH*Opium Brown,
Linear Texture Doors



MILAN*Dimensional, Diamond
Pattern, White



OSLO*
Black Oak Sides,
Black Glass Doors



MIAMI*Gloss Warm White



BARCELONA, WHITE Natural Walnut, Warm White Doors, Beveled-Edge Top



BARCELONA, BLACK Natural Walnut, Black Glass Doors, Beveled-Edge Top



SIENNA*Medium Walnut,
Flat-Front
Wood Doors



SIENNA*Gray Walnut,
Flat-Front
Wood Doors



SIENNA* Black Oak, Flat-Front Wood Doors



SIENNA*Wenge Oak,
Flat-Front
Wood Doors



SIENNA* Natural Oak, Flat-Front Wood Doors