

IBA3AC
IBA3AC-W




Max Load
25b (11.3kg)

In-Wall Accessory Box with 125V Duplex Power Receptacle

FOR RECESSED CABLE MANAGEMENT AND POWER STORAGE

Peerless-AV's In-Wall Accessory Box with 125V Duplex Power Receptacle allows cables and cords to become virtually invisible. When combined with a Peerless-AV® wall mount, the In-Wall Accessory Box provides the perfect behind-the-screen solution to conceal unsightly power and low voltage cables, like HDMI or RCA, behind flat panel displays, audio components or other devices. Complete with a receptacle knock-out for adding included duplex power module, the IBA3AC creates a professional look in any setting.

- 15 Amp/125 Volt duplex receptacle power source with surge protection with NEMA 5-15R
- Low-profile design fits behind the thinnest mounts and flat panel displays
- Component cables routed inside the wall
- Sleek design makes outside cable covers unnecessary
- Heavy gauge cold rolled steel construction
- Cable ties and grommet included for an organized finish
- Can be mounted horizontally or vertically for better positioning

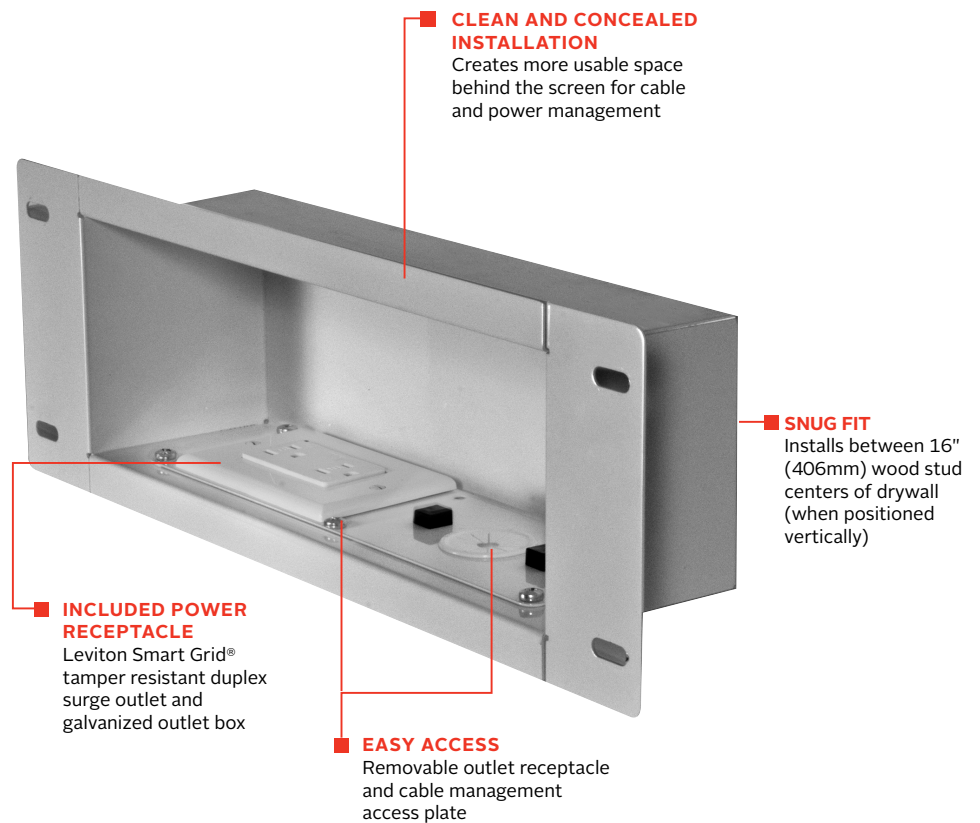

Clean and Easy Cable Management

RoHS
2002/95/EC

Please visit peerless-av.com/en-us/patents for patent information.

✉ info@peerless-av.com
🌐 peerless-av.com

peerless-AV®
Driving Technology Through Innovation

IBA3AC(-W) In-Wall Accessory Box with 125V Duplex Power Receptacle for Recessed Cable Management and Power Storage

Product Specifications

	DIMENSIONS (W X H X D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
IBA3AC(-W)	Usable Space: 13.10" x 4.35" x 3.76" (333 x 110 x 96mm) Overall Dimensions: 17.42" x 5.75" x 3.76" (442 x 146 x 96mm)	5.5lb (2.49kg)	25lb (11.33kg)	Scratch Resistant Fused Epoxy	IBA3AC: Gloss Black IBA3AC-W: White

Package Specifications


	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
IBA3AC(-W)	21.00" x 11.50" x 5.25" (533 x 292 x 133mm)	6lb (2.72kg)	IBA3AC: 735029275855 IBA3AC-W: 735029275879	Recessed Storage Accessory Box, Leviton Smart Grid® Tamper Resistant Duplex Receptacle, Galvanized Outlet Box with Knock Outs, Mounting Hardware, Cable Management Ties and Grommet	1

NOTES:
DO NOT run or pull the TV cord or other electrical cords inside the drywall. National Electrical Code (NEC) DOES NOT ALLOW the installation of the TV power cord or an extension cord behind the wall. When adding a duplex receptacle power outlet ONLY LICENSED PROFESSIONALS SHOULD INSTALL THIS PRODUCT. Be sure to install the Recessed Cable Management and Power Storage Accessory Box in accordance with the National Electrical Code (NEC) and local codes.

Leviton Smart Grid® Model# T5280-E (black) & T5280-W (white) Specifications:
 Joules Rating – 720
 Dielectric Voltage – Withstands 2000V per UL498
 Max Surge Current – L-N: 18kA, L-G: 9kA, N-G: 9kA
 SCCR – 5000A
 MCOV – 150V rms
 Alarm Indicator – LED Light
 For further information see website www.leviton.com

Accessories

ACC415: Metal Stud Fasteners

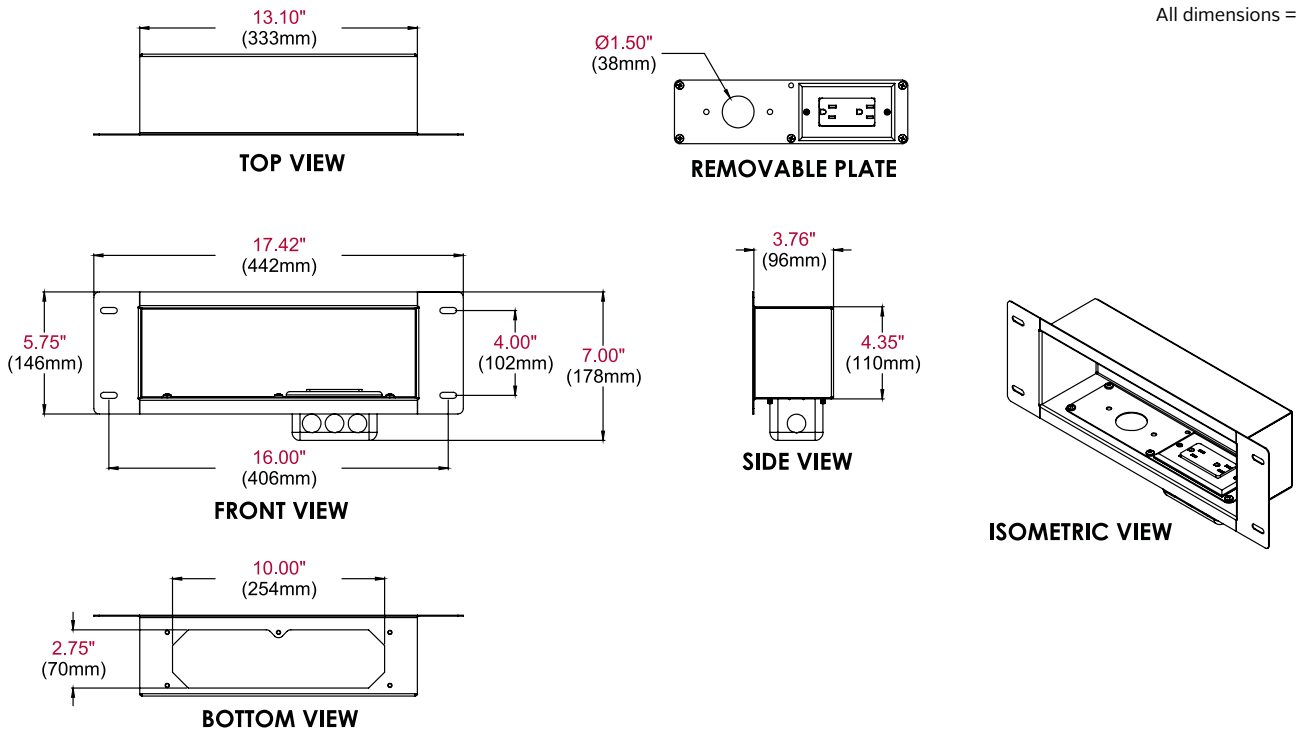

Architect Specifications

The In-Wall Accessory Box with 125V Duplex Power Receptacle shall be a Peerless-AV model IBA3AC(-W) shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
 2300 White Oak Circle
 Aurora, IL 60502 USA
(800) 865-2112
(630) 375-5100
Fax: (800) 359-6500

Peerless-AV EMEA
 Unit 3 Watford Interchange
 Colonial Way, Watford
 Herts, WD24 4WP
 United Kingdom
+44 (0) 1923 200100
Fax: +44 (0) 1923 200101

Peerless-AV Latin America
 Ave de las Industrias 413
 Parque Industrial Escobedo
 Escobedo, N.L.,
 Mexico 66062
+52 (81) 8384-8300
Fax: +52 (81) 8384-8360

