



OVERVIEW

The Zone Line-Out Controller (ZONE-LO) offers the perfect solution for organizations simply requiring the broadcast of audio, via the network, to existing traditional speakers. Connect the ZONE-LO to an amplifier. This will integrate a group of speakers, connected to that amplifier, to the network.

ANALOG INTEGRATION



Connect to an existing amplifier

SIP INTEGRATION



Call to page analog speakers

SOFTWARE



Diagnostic software included
Compatible with third-party
software, including InformaCast,
Revolution, and Cisco CallManager

SOLUTIONS

- Paging
- Bell scheduling
- Code alerts
- Emergency notification
- Sound Masking
- Music streaming

ADDITIONAL FEATURES

- Built-in web server
- Full multicast and broadcast support
- Requires Cat5 or Cat6 cable
- Unbalanced line level audio out
- Line out signal level up to 2 Vpp
- 8-ohm speaker output

SOFTWARE

The ZONE-LO integrates easily with third-party mass notification software, as well as SIP and VoIP phone systems, enabling a facility to take advantage of all the device capabilities. The device also comes with diagnostic software (compatible to run alongside third-party software), and an on-board web server interface, both which provide the ability to monitor and troubleshoot the ANetD devices on the network.

Third-Party Software

- InformaCast (Singlewire)
- Revolution (Syn-Apps)
- IPSession (IPCelerate)
- MessageNet Systems
- BellComander (Acro Vista)
- And more!


VoIP Phone Systems

- Cisco CallManager
- Mitel
- Avaya
- 3CX
- Polycom
- And more!

IPClockWise

- Diagnostic tool included with device purchase
- Complements investment in third-party software
- Developed and supported by Advanced Network Devices

DIMENSIONS

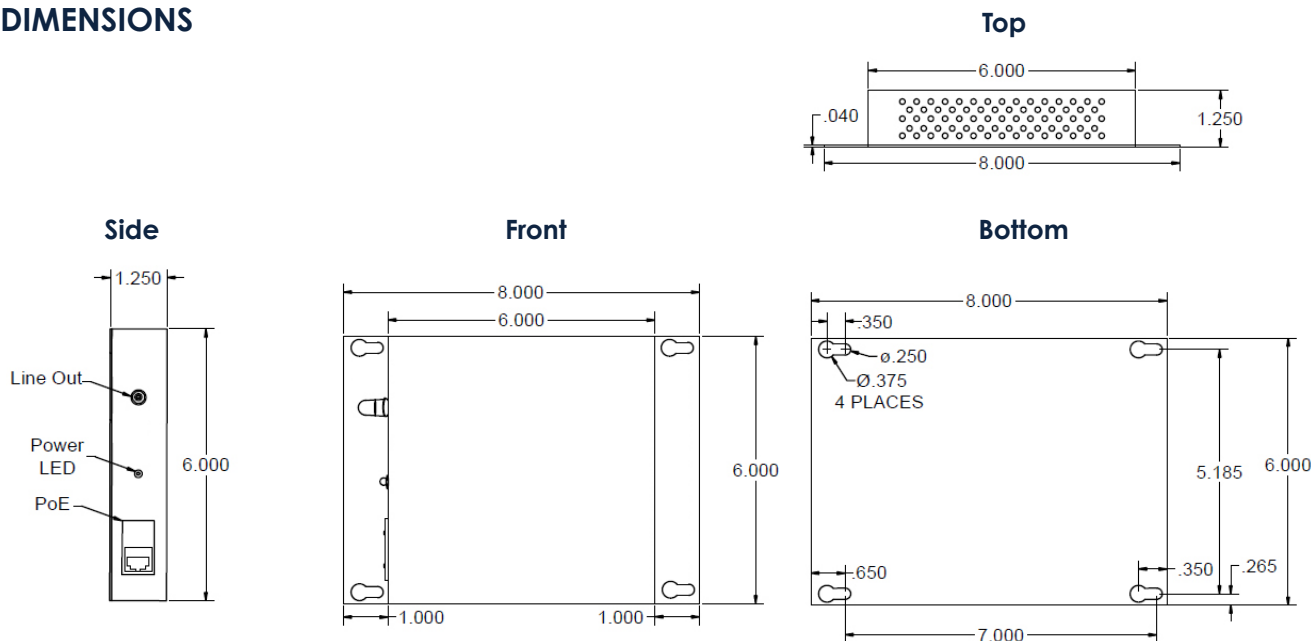

SPECIFICATIONS

ZONE-LO

ETHERNET I/F	10/100 Mbps
AUDIO POWER	8 W / 16 W
POWER INPUT	PoE (IEEE802.3af) 15.4 W or PoE+ (IEEE802.3at) 30.0 W
SUPPORTED PROTOCOLS	SIP, IPv4, IPv6, 802.1X, HTTP, SLP, TFTP, NTP, SNMPV1 & SNMPV2c, DHCP, IGMP, ICMP, TCP/IP, LLDP-MED, UDP, MDNS & MDNS-SD
OPERATING TEMPERATURE	0° TO 50° C (32° TO 122° F)
DIMENSIONS	8.0" W x 1.25" H x 6.0" D
WEIGHT	1 lb 7 oz (652 g)
WARRANTY	2 Year Limited

Due to continual product development, specifications are subject to change without notice.

